

Field Measurement Sheet

PRODIMAX

Company:


Contact:

Title:

Phone:

Insulation & Thermal Services
 175, rue d'Amsterdam, local #2
 St-Augustin de Desmaures
 (Quebec) G3A 2V5
 Phone: 418.878.7132
 Fax: 418.878.7194
 www.prodimax.ca

Flange Valve Oval Bonnet

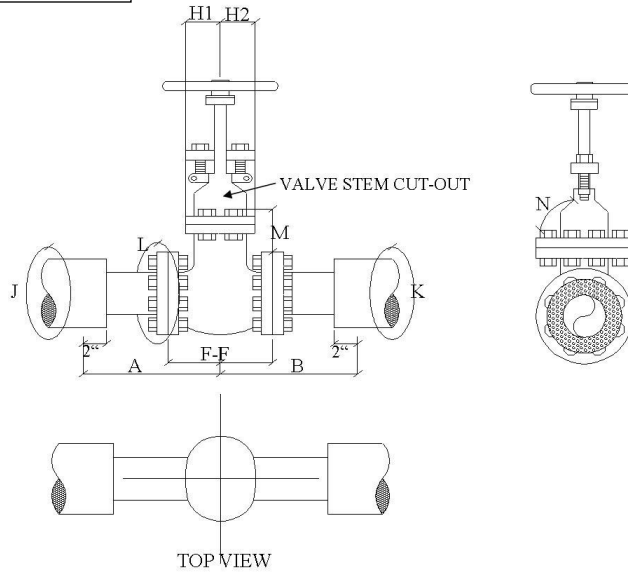

A - Center of Flange to Left Overlapping Insulation 2"	<input type="text"/>
B - Center of Flange to Right Overlapping Insulation 2"	<input type="text"/>
F-F - Center of Flange to Center of Flange (Verify valve type)	<input type="text"/>
H1 - Center of Valve to Left Side of Bonnet	<input type="text"/>
H2 - Center of Valve to Right Side of Bonnet	<input type="text"/>
J - Circumference of Insulation on Left Side	<input type="text"/>
K - Circumference of Insulation on Right Side	<input type="text"/>
L - Circumference of Flange	<input type="text"/>
M - Height from Top of Flange to Top of bonnet Stud Bolts	<input type="text"/>
N - Distance Edge of Bonnet to Center of Valve (Follow curve if necessary)	<input type="text"/>

Tag:	Temp (°F)	Pipe Size (in.)				Lb. Rating
<input type="text"/>	<input type="checkbox"/> 0-450	<input type="checkbox"/> 0.5	<input type="checkbox"/> 2	<input type="checkbox"/> 6	<input type="checkbox"/> 16	<input type="checkbox"/> 150
	<input type="checkbox"/> 451-650	<input type="checkbox"/> 0.75	<input type="checkbox"/> 2.5	<input type="checkbox"/> 8	<input type="checkbox"/> 18	<input type="checkbox"/> 300
	<input type="checkbox"/> 651-800	<input type="checkbox"/> 1	<input type="checkbox"/> 3	<input type="checkbox"/> 10	<input type="checkbox"/> 20	<input type="checkbox"/> 600
	<input type="checkbox"/> 801-1000	<input type="checkbox"/> 1.25	<input type="checkbox"/> 4	<input type="checkbox"/> 12	<input type="checkbox"/> 24	<input type="checkbox"/> 900
	<input type="checkbox"/> 1001-1100	<input type="checkbox"/> 1.5	<input type="checkbox"/> 5	<input type="checkbox"/> 14		<input type="checkbox"/> 1500

Filled By: Date: